

Introducing Fill T-Tap

High-capacity, powerhouse tap dispenser combines speed, style and precision

- BRITA's most powerful water dispenser with the highest cooling capacity – perfect for busy restaurants, bars, hotels, large offices and events
- Choice of four refreshing water types: unchilled and chilled still, chilled semi-sparkling and sparkling
- Elegant, low-profile tap installation with no unsightly tanks, filters or hoses
- Three drip tray options (without, on-the-counter or integrated) to suit you and your premises
- Precision vessel positioning on drip tray guides and accurate portion control without a drop of water waste. Hit the button, walk away, collect
- TwinFilling doubles service efficiency by filling two bottles or glasses simultaneously



Product compliant with
Reg. EC No 1935/2004



Fill T-Tap

High-capacity, powerhouse tap dispenser combines speed, style and precision.



reddot winner 2021



TwinFilling efficiently fills two bottles/glasses simultaneously

Our water dispensers produce 86% less CO₂ emissions than pre-bottled water and 64% less than bottled water dispensers

BottleGuard to easily position bottles/glasses on the drip tray for precise filling




SmoothFinishing portion control to fill bottles/glasses without overflow

ThermalGate™ powerful thermal-disinfection feature



BRITA CLARITY Protect filter preserves minerals in water while removing unwanted substances

- Three installation options:
- Tap system without drip tray
 - Tap system with countertop drip tray
 - Tap system with integrated drip tray

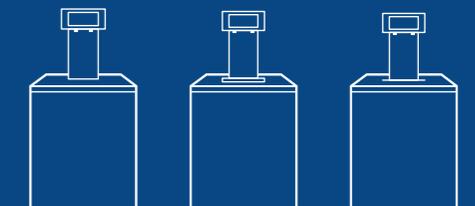




Watch our Video on Youtube



Fill T-Tap/Fill Pro



Technical data



Model	Fill still + sparkling				
Design / Type	tap system: without drip tray	tap system: with countertop drip tray	tap system: with integrated drip tray	countertop	base cabinet
Installation scenario	surfaces with existing drip trays, e.g. bars with a waste water connection.	surfaces made of materials difficult to drill (glass, stone, concrete, metal).	surfaces relatively easy to drill, e.g. for a waste water connection.	suitable where there is limited space below the countertop.	flexible installation in diverse scenarios, independent of existing counters, etc.
Types of water					



Configuration options					
For installation without waste water connection			waste water container		

Specifications						
Cooling capacity	120 l/h					
Unit dimensions (W x H x D)	tap: 290 x 544 x 128 mm undercounter appliance (cooler): 302 x 603 x 483 mm			401 x 544 x 563 mm	base cabinet: 400 x 910 x 565 mm base plate: 520 x 4 x 564 mm	
Dispensing height	383 mm	345 mm	376 mm	345 mm		
Weight	tap: 5.1 kg undercounter appliance (cooler): 40 kg	tap: 5.1 kg undercounter appliance (cooler): 40 kg	tap: 5.1 kg undercounter appliance (cooler): 40 kg	42 kg		base cabinet: 22 kg base plate: 10 kg
Max. power consumption	529 W		529 W		529 W	
Max. flow rate	2 l/min					