Model HTHB8-WF

PRODUCT SPECIFICATIONS


Halsey Taylor HydroBoost® In-Wall Bottle Filling Station, Filtered 8 GPH Stainless. Chilling Capacity of 80LPH (litres per hour) of 50°F drinking water, based on 80°F inlet water and 90°F ambient, per ASHRAE 18 testing. Features shall include Sanitary Sensor Activated, Visual Filter Monitor, Filtered, Green Counter™, Laminar Flow, Antimicrobial, Real Drain. Electronic Bottle Filler Sensor activation. Product shall be Wall Mount (In-Wall Frame/Plate), for Indoor applications, serving 1 station(s). Unit shall be certified to UL 399 and CAN/CSA C22.2 No. 120. Unit shall be lead-free design which is certified to NSF/ANSI 61 & 372 (lead free) and meets Federal and State low-lead requirements.

| Special Features: | Sanitary Sensor Activated, Visual Filter Monitor, Filtered, Green |
|----------------------------------------------------------------|-------------------------------------------------------------------|
| | Counter™, Laminar Flow, |
| | Antimicrobial, Real Drain |
| Finish: | Stainless Steel |
| Power: | 230V/50Hz |
| Bubbler Style: | No Bubbler |
| Activation by: | Electronic Bottle Filler Sensor |
| Mounting Type: | Wall Mount (In-Wall Frame/Plate) |
| Chilling Option*: | 80 LPH |
| Full Load Amps | 2.28 |
| Rated Watts: | 220-240 |
| Dimensions (L x W x H) cm: | 23.5 x 38 x 37.5 (cm) |
| Approx. Shipping Weight: | 36kg |
| Installation Location: | Indoor |
| No. of Stations Served: | 1 |
| *Based on 80° F inlet water & 90° F ambient air temp for 50° F | |

- Touchless, sensor-activation, designed for easy use.
 Visual Filter Monitor: LED Filter Status Indicator for when filter change is necessary.
- Filter is rated for particulate, chlorine, taste and odor reduction. 3,000 gal. capacity. Green Counter: Informs
- user of number of 20 oz. plastic water bottles saved from waste.
- Laminar flow provides clean fill with minimal splash.

chilled drinking water.

- Silver Ion Antimicrobial protection on key plastic components to inhibit the growth of mold and mildew.
- · Real Drain System eliminates standing water.

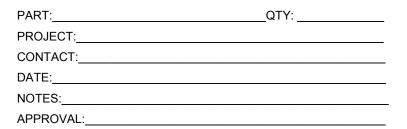



AMERICAN PRIDE. A LIFETIME TRADITION. Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.



Included with Product: Bottle Filler

Mounting Frame

Chiller Filter

PRODUCT COMPLIANCE

ADA

Buy American Act CAN/CSA C22.2 No. 120

GreenSpec® WRAS

NSF/ANSI 42, 53, 61, and 372 (lead free)

UL 399









5 Year Limited Warranty on the refrigeration system of the unit. Electrical components and water system are warranted for 12 months from date of installation. Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty.

Front Top Rear Model: Eco-Dispenser HTHB-1500 (all models) **Product Specifications:** The cabinet material is manufactured from high pressure decorative laminates (Formica® Laminate) according to the 300 European Standard EN 438 and to ISO 4586. Formica Laminates do not suffer from corrosion and oxidation, they do not need any further surface protection (lacquers or paints). **Water Connection Pipe (Supplied)** Top Includes - 2m John Guest or similar water tubbing 1/4" 70 -- Inline Water Stop Tap - 15mm – 1/2" Female BSP female Connector **Drain Pipe (Supplied)** Includes - Max Length 2.5M, O/D 32mm - I/D 22mm **Power Requirements:** One single 230v power socket required Side Front Side Rear Internal - Frame - 300 -600 **-** 300 → 50 500 Water Dispensing Point— 300 Activation Sensor 32 mm OD 20 mm ID Dispensing 518 Area 310 1400 1056 899 Waste 519 425 726 Tube 1500 750 710 1500 750 710 163 190 Frame to Shelf 140 All dimensions provided in millimeters.